


## MS T STRAINER

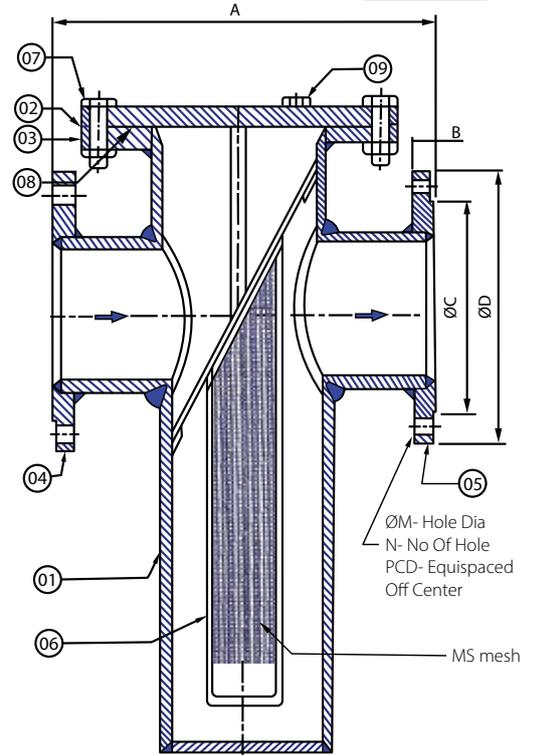

NOTE : Drawings are for reference only

Sr.No	Size	A	B	ØC	ØD	ØM	N	PCD	Qty.
01	25	200.0	11.0	51	108.0	16	4	79.0	01 No.
02	40	260.0	14.0	73	127.0	16	4	98.5	01 No.
03	50	260.0	16.0	92	152.0	19	4	120.5	01 No.
04	65	260.0	17.5	105	178.0	19	4	140.0	01 No.
05	80	300.0	19.0	127	190.5	19	4	152.4	01 No.
06	100	330.0	24.0	157	229.0	19	8	190.5	01 No.
07	125	400.0	24.0	186	254.0	22	8	215.9	01 No.
08	150	400.0	25.0	216	279.0	22	8	241.0	01 No.
09	200	465.0	28.5	270	343.0	22	8	298.4	01 No.
10	250	515.0	30.0	324	406.0	25	12	362.0	01 No.
11	300	575.0	32.0	381	483.0	25	12	432.0	01 No.
12	350	680.0	35.0	413	533.4	28.6	12	476.2	01 No.
13	400	750.0	36.5	470	597.0	28.6	16	539.7	01 No.
14	450	850.0	40.0	533	635.0	31.7	16	577.8	01 No.
15	500	1000.0	43.0	584	698.5	31.7	20	635.0	01 No.
16	600	1200.0	47.6	692	812.8	34.9	20	749.3	01 No.

Hydraulic Test Pressure	
Body	Seat
225 PSIG	150 PSIG

Mfg.Design	As per Mfg. Std.
End Connection	F/E Drill as per ANSI B 16.5 150#
Face to Face	As per Mfg. Std.

No.	Description	Material	Qty.
01	Body	M.S.(IS:3589)	1
02	Top Cover	M.S.(IS:2062)	1
03	Body Cover	M.S.(IS:2062)	1
04	Inlet Flange	M.S.(IS:2062)	1
05	Out Let Flange	M.S.(IS:2062)	1
06	Screen	MS Screen	1
07	Cover Bolt & Nut	Mild Steel (MS)	===
08	Gasket	Nitrile	1

Tolerance:- ±3mm